

Software FineCut8 maximizes product performance


[Standard feature] Plug-in software for Illustrator CC2014



Plug-in software for Adobe Illustrator CC2014 Standard feature

The combination of FineCut8 and a register-mark-reading sensor allows calibrated inclination of coordinates or distance to assure accurate cutting. To prevent incorrect cutting, long contour cutting lines are split and individually cut. This split cut function avoids having the blade cut the media/substrate beyond the specified range.

[Main features] Simple and direct cutting from Adobe Illustrator / “Multiple cut function” allows the plotter to cut on the same contour cutting line several times with different cut conditions. “Split cut function” prevents an overcut of the media/substrate.



Creating four resister marks and printing



Cutting sheets with CFL-605RT



Cutting foam material with CFL-605RT



Assembling every part for finishing!

Specifications


Type		Flatbed cutting plotter
Driving method		X/Y/Z/Θ 4 axes: DC servo motor
Material holding method		Air suctioning by a vacuum unit
Maximum media		630mm×530mm
Cutting area		610mm×510mm
Maximum cutting speed		XY: 423 mm/s (45° angle direction) Z: 30 mm/s
Maximum downforce pressure		Eccentric cutter: 1,000g / Tangential cutter and Creasing roller: 1,500 g
Maximum media thickness		Reciprocating cutter: 10 mm / Tangential cutter: 2 mm
Maximum media weight		10 kg / 22lb (This is not one-point-load strength)
Static accuracy	Repeatability	0.2 mm or lower (Material shrinkage is ignored)
	Distance accuracy	Moving distance × ±0.2% or lower or ±0.1 mm or lower Larger value is applied
	Original repetition accuracy	0.1 mm or lower
A unit		Attachable tools: Eccentric cutter, Pen
B unit		Attachable tools: Reciprocating/Tangential cutter, Creasing roller
Command		MGL-II c3
Interface		USB 2.0(High Speed) 、RS-232C, Ethernet
Power specification		Single phase AC 100–120 V/200–240 V, 50/60 Hz
Noise level		70 db or lower(The maximum level is generated while a reciprocating cutter or a vacuum blower is used.)
Power consumption		500W
Dimensions (W×D×H)		1,320mm×1,045mm×1,100mm
Weight		109 kg or lower (Blower, 20 kg, included)
Certifications		VCCI class A, CE marking (Machinery directive, RoHS directive), CB, UL 60950-1, REACH, FCC class A

Supplies

Product number	Product name	QTY per package Compatible product model		Note
SPA-0183	Pen holder for MITSUBISHI	1	CG/CF series	One refill is attached Compatible refill: SPC-0726
SPC-0726	Refill for MITSUBISHI ballpoint pen	10	CG/CF series	Compatible holder: SPA-0183
SPB-0086	Super hard edge 2"x 10 mm	5	CFL	One blade is attached as a standard accessory
SPA-0260	Cutter holder 07L	1	CFL	Standard accessory
SPB-0043	High-speed steel blade 30°	200	CF series	Standard accessory
SPB-0045	Carbide blade 30°	3	CF series	
SPA-0261	Tangential Cutter holder 2N α	1	CFL	Standard accessory
SPA-0259	Eccentric cutter holder C	1	CFL	Standard accessory
SPB-0085	Eccentric cutter blade C	3	All cutting plotter models	One blade is attached as a standard accessory Compatible holder: SPA-0001/SPA-0090/SPA-0259
SPC-0785	Felt mat 605	1	CFL	Standard accessory
SPC-0786	Cutting mat 605	1	CFL	Standard accessory
SPC-0787	Adsorption sheet	1	CFL	100 m per roll
SPA-0262	Creasing holder L	1	CFL	Standard accessory
SPB-0087	Creasing roller φ9	1	CFL	Standard accessory
SPB-0030	Swivel Blade for PVC with low-pressure	3	All cutting plotter models	
SPB-0006	Swivel Blade for reflecting sheet	2	All cutting plotter models	
SPB-0007	Swivel Blade for fluorescent sheet	3	All cutting plotter models	
SPB-0001	Swivel Blade for PVC sheet	3	All cutting plotter models	
SPB-0003	Swivel Blade for small letters	3	All cutting plotter models	
SPA-0001	Cutter holder	1	All cutting plotter models	
SPA-0090	Cutter holder	1	All cutting plotter models	Standard accessory
OPT-S1005	Blade tip adjuster	1	All cutting plotter models	Loupe
OPT-C0066	Blade tip adjuster	1	All cutting plotter models	Dial type
SPA-0163	Grease	1	All cutting plotter models	Standard accessory

For
INDUSTRIAL
DESIGN

Compact Flatbed Cutting Plotter
CFL-605RT

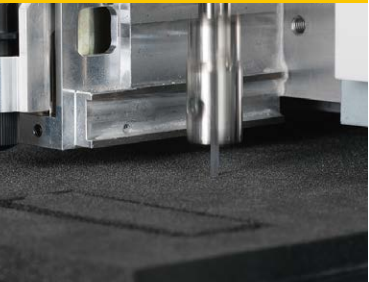

Compact &
Multi Cutting
Rapidly bringing ideas into shape



MIMAKI ENGINEERING CO., LTD.

2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512, Japan
Tel: +81-268-78-2288
trading@mimaki.jp www.mimaki.co.jp

MIMAKI USA, INC.

150 Satellite Boulevard, suite A, Suwanee, Georgia 30024, U.S.A
Atlanta +1-888-530-3988 Boston +1-888-530-3986
Los Angeles +1-888-530-3987 Chicago +1-888-530-3985
www.mimakiusa.com

MIMAKI EUROPE B.V.

Stammerdijk 7E, 1112 AA Diemen, The Netherlands
Tel: +31-20-4627-640
info@mimakieurope.com
www.mimakieurope.com @MimakiEurope

DB40270-02

Compact & Multi Cutting

Compact multifunction cutting plotter



CFL-605RT is compact but provides a wide range of functions including eccentric, tangential, and reciprocating cuttings and creasing. Ideal for package mockup production and small-hot package production.



Reciprocating cutter for cutting cushioning material

Cushioning for packaging can also be cut with CFL-605RT. Thick materials are neatly cut by a vertical reciprocating motion. The reciprocating cutter is capable of cutting materials of up to 10-mm thickness.

Reciprocating cutter (vertical reciprocating cutting)



The blade cuts thick materials by a vertical reciprocating motion. It is ideal for foam or cardboard cutting. In addition, the blade is capable of cutting a range of material thicknesses, from thin to thick, by precisely controlling the blade edge direction. (Before cutting, please place a felt mat on the cutting table under the material to hold it in place.)

[Optimum materials for a reciprocating cutter]

Cardboard, foam plastic board, and sponge

Maximum vertical vibration rate: 3,000 reciprocating motions/min.

Vibration stroke: 5 mm

Downforce pressure: 1,500 g (Fixed pressure value)

Maximum cutting thickness*: 10 mm

(*Thickness varies depending on materials.)



Cutting and creasing with one compact plotter unit.

The versatile CFL-605RT plotter is capable of cutting and creasing. It can be used on paper, PET as well as film.

Eccentric cutter

Maximum cutting thickness: 1 mm
Materials are properly cut with an optimal downforce setting from 30 and 1,000 g for optimum cutting



Creasing roller



The roller creases materials and enables the creation of a perfect package. Downforce pressures are adjustable from 500 to 1,500 g depending on the material.



Tangential cutter for thick material cutting

The blade is able to cut not only thick materials up to 2 mm but also thin films by controlling low and high downforce pressures precisely.

Tangential cutter (Cutting materials by downforce pressure)



The blade edge is automatically and precisely controlled along contour cutting lines specified by the software. It is good for cardboard and foam board.

[Optimum materials for a tangential cutter]

Coated cardboard, reflective vinyl, rubber sheets, industrial materials, and F/G flute cardboard.

Downforce pressure: 500–1,500g (Optimum pressure varies depending on material)

Maximum cutting thickness*: 2mm

(*Thickness varies depending on material)

Accurate cutting by reading register marks

A sensor reads register marks on the material for precise cutting.




Offering various tool combinations to meet a range of work demands

Depending on application, different tools for each unit can be switched in for optimum cutting.

[Adjustable tools for each unit]


[A unit]
Pen/Tangential cutter
[B unit]
Reciprocating cutter
Tangential cutter
Creasing roller

*Tools need to be switched manually by users.



A vacuum suction system reduces lifting of material during operation by holding the material in place.

Lightweight or thin materials tend to move or lift during cutting; therefore, CFL-605RT offers a combination of features to prevent this problem. A compact built-in vacuum unit holds the material in place during reciprocate cutting. An adsorption sheet (SPC-0787) put on top of the material to be cut enhances vacuum suction by reducing air flow through the material, and the adsorption sheet is easily unrolled from the left side of machine.



*Please place felt mat 605 (SPC-0785) on the cutting table during reciprocate cutting.
*Please tape four corners of any material that cannot be held securely by the vacuum unit.
* An adsorption sheet (SPC-0787) is sold separately.



Easy mock-up production in combination with UV inkjet printer!

Conventionally, there are many work processes involved in creating packaging for a product. You might ask an outside contractor to create the package; however, it would take longer to complete the work because of misunderstandings, distance, time differences, etc. The combination of CFL-605RT and UJF-6042* offers a total solution, not only for printing on a product but also for the design and creation of product cushioning and packaging. This combination delivers effective high-mix low-volume production and significantly shortens the lead time for prototype creation and small-hot production by on-demand fabrication.

What is the flatbed printer UJF-6042?

UJF-6042 is a LED UV curing inkjet printer capable of printing on objects as well as on packaging materials up to A2 size.



Compact flatbed cutting plotter

CFL-605RT



LED UV curing flatbed inkjet printer

UJF-6042
UV PRINTER


[Printing and packaging processes]

Printing on USB memory sticks and creating packaging

Production processes by UJF-6042



Direct printing of decorations onto a USB memory stick



Printing on coated cardboard



Cutting the printed cardboard to make packaging



Cutting of cushioning material



Assembling every part for finishing!

Production processes by CFL-605RT