


Printing Technology	Digital 4 LED Full-color Electrophotographic Printing Method
Print Resolution	600 x 600 dpi 600 x 1200 dpi 600 x 600 dpi (2 levels) Physical dot pitch: 1200 dpi
Warm-up Time	Approx. 32.0 seconds from power-on Approx. 27.0 seconds from power save
First Print Out Time	Color: Approx. 9.5 seconds Mono: Approx. 9.5 seconds
Print Speed	A4 35 ppm color, 35 ppm mono
Interface	100BASE-TX/10BASE-T, USB 2.0 (High Speed), USB 2.0 (High Speed) Host
Protocol	TCP/IP, IPX/SPX, EtherTalk
Printer Language	PCL 5c emulation, PCL 6 (XL) emulation, XPS emulation, PostScript 3 emulation, IBM ProPrinter emulation, Epson FX Emulation
Supported OS	Windows 7, Windows 7 x64, Windows Vista, Windows Vista x64, Windows XP, Windows XP x64, Windows 2000, Windows Server 2008 R2, Windows Server 2008, Windows Server 2008 x64, Windows Server 2003, Windows Server 2003 x64, OS X 10.7, Mac OS X 10.6, Mac OS X 10.5, Mac OS X 10.4, Mac OS X 10.3, Linux
Memory (Std./Max.)	256MB/768MB
Font	PCL emulation 87 scalable fonts, 4 bitmap fonts, Adobe PostScript 80 fonts
Paper Size	A3, A4, A5, A6, B4, B5, B6, Legal 14, Legal 13.5, Legal 13, Tabloid (11" x 17"), Letter, Executive, 16K, 8K, Statement, Banner, Envelopes, Postcard, Return postcard, Custom Size: Width 64-297 mm x Length 90-1321 mm
Paper Weight	Tray 1 : 17.0 - 58.5 lb. bond (64 - 220 gsm) Multi-purpose tray : 17.0 - 68.1 lb. bond (64 - 256 gsm) (Optional)Additional Tray : 17.0 - 46.8 lb. bond (64 - 176 gsm)
Input Capacity	Tray 1 : 300 sheets Multi-purpose tray : 100 sheets (Optional)Additional Tray : 530 sheets
Output Capacity	Face Down : Max. 250 sheets Face Up : Max. 100 sheets
Dimensions(WxDxH)	17.7" x 21.7" x 14.2" (449 x 552 x 360 mm)
Weight(not includes supplies)	Approx. 88.2 lb. (40.0 kg)

Operating Environment	Operating: 50 - 90 °F (10 - 32 °C), 20 - 80 %RH Storage: 14 - 109 °F (-10 - 43 °C), 10 - 90 %RH No condensation
Power Source	Single phase 110 - 127 VAC $\pm 10\%$, 50/60 Hz $\pm 2\%$
Power Consumption	Operating: Max. 1,400W / Ave. 700W Idle: 100W Power Save: 12.0W Deep Sleep: 0.7W Auto-Off: 0.1W
Safety & Environment Regulation	cULus Mark
Noise Level	Operating :Approx. 52 dBA Idle: < 32 dBA
Duty Cycle	Recommended: 100,000 pages/month Maximum: 500,000 pages/month
In the Box	Starter toner cartridge x 4, Image Drum x 4, Power cable, DVD-ROM


Space required

| Space required |

side

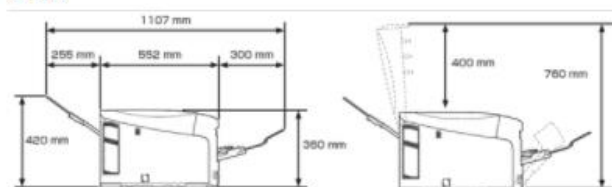

Top

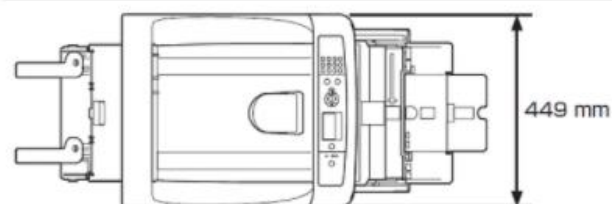

fulloption1

