


Printing Technology	Digital 4 LED Full-color Electrophotographic Printing Method
Print Resolution	600 x 600 dpi (4 levels) 600 x 600 dpi 600 x 1200 dpi Physical dot pitch: 600 dpi
Warm-up Time	Approx. 25.0 seconds from power-on Approx. 20.0 seconds from power save
Interface	1000BASE-T/100BASE-TX/10BASE-T, (Optional) Wireless LAN (IEEE802.11a/b/g/n), USB 2.0 (High Speed)
Protocol	TCP/IP
Printer Language	PostScript 3 emulation
Supported OS	Windows 10, Windows 10 x64, Windows 8.1, Windows 8.1 x64, Windows 8, Windows 8 x64, Windows 7, Windows 7 x64, Windows Vista, Windows Vista x64, Windows Server 2016, Windows Server 2012 R2, Windows Server 2012, Windows Server 2008 R2, Windows Server 2008, Windows Server 2008 x64, macOS 10.12, OS X 10.11, OS X 10.10, OS X 10.9, OS X 10.8
Memory (Std./Max.)	256MB/768MB
Font	PostScript emulation 80 fonts
Paper Size	A3, A4, A5, A6, B4, B5, B6, B6 Half, Tabloid (11" x 17"), Letter, Legal 13, Legal 13.5, Legal 14, Executive, Statement, 8.5" SQ, Folio, 8K, 16K, Photo Size (4" x 6", 5" x 7") (100 x 150mm, 125 x 175mm), Index Card (3" x 5") (75 x 125mm), Custom Size: Width 64-297 mm x Length 90-431 mm
Paper Weight	Tray 1 : 17.0 - 58.5 lb. bond (64 - 220 gsm) Multi-purpose tray : 17.0 - 68.1 lb. bond (64 - 256 gsm)
Input Capacity	Tray 1 : 300 sheets Multi-purpose tray : 100 sheets
Output Capacity	Face Down : Max. 200 sheets Face Up : Max. 100 sheets
Dimensions(WxDxH)	17.7" x 21.7" x 14.2" (449 x 552 x 360 mm)
Weight(includes supplies)	Approx. 81.6 lb. (37.0 kg)
Operating Environment	Operating: 50 - 90 °F (10 - 32 °C), 20 - 80 %RH Storage: 32 - 109 °F (0 - 43 °C), 10 - 90 %RH No condensation

Power Consumption	Operating: Max. 1,400W / Ave. 700W Idle: 100W Power Save: 12.0W Deep Sleep: 0.7W Auto-Off: 0.1W
Safety & Environment Regulation	cULus Mark
Noise Level	Operating :Approx. 52 dBA Idle: < 32 dBA
In the Box	Image Drum x 4, Starter toner cartridge x 4, DVD-ROM, Manuals, Power cable

Space required

| Space required |

side

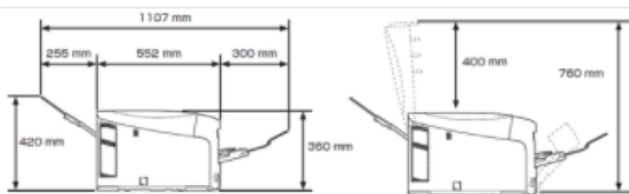

front

